

This is the Revision A verion of the [IRremote1 module](#). The status of this project is [work in progress](#).

IRRemote1 Robobrick (Revision C)

Table of Contents

This document is also available as a [PDF](#) document.

- [1. Introduction](#)
- [2. Programming](#)
- [3. Hardware](#)
 - ◆ [3.1 Circuit Schematic](#)
 - ◆ [3.2 Printed Circuit Board](#)
- [4. Software](#)
- [5. Issues](#)

1. Introduction

The IRRemote1 module is used to send and received IR signals. It currently takes signals from [Sony IR](#) remotes. The transmission facility is a little underdeveloped (i.e. non-existent) at the moment. The IR Receiver is the Sharp GP1U26X.

2. Programming

The basic operation is to send a query to the IRRemote1 RoboBrick to return the last two bytes of IR remote command.

The IRRemote1 module supports [RoboBrick Interrupt Protocol](#). The interrupt pending bit is set whenever a command has been received. Once the interrupt pending bit is set, it must be explicitly cleared by the user.

The IRRemote1 RoboBrick supports both the standard [shared commands](#) and the [shared interrupt commands](#) in addition to the following commands:


Command	Send/ Receive	Byte Value								Discussion	
		7	6	5	4	3	2	1	0		
Read Inputs	Send	0	0	0	0	0	0	0	0	0	Return input values <i>abcdefghijkl</i>
	Receive	0	0	0	0	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>		
	Receive	<i>e</i>	<i>f</i>	<i>g</i>	<i>h</i>	<i>i</i>	<i>j</i>	<i>k</i>	<i>l</i>		
Read Interrupt Bits	Send	1	1	1	0	1	1	1	1	Return the interrupt pending bit <i>p</i> and the interrupt enable bit <i>e</i> .	
	Receive	0	0	0	0	0	0	<i>e</i>	<i>p</i>		
Set Interrupt Bit Commands	Send	1	1	1	1	0	<i>c</i>	<i>c</i>	<i>c</i>	Execute shared set interrupt command <i>ccc</i> .	
Shared Commands	Send	1	1	1	1	1	<i>c</i>	<i>c</i>	<i>c</i>	Execute shared command <i>ccc</i> .	

3. Hardware

The hardware consists of a circuit schematic and a printed circuit board.

3.1 Circuit Schematic

The IRRemote1 RoboBrick schematic is shown below:

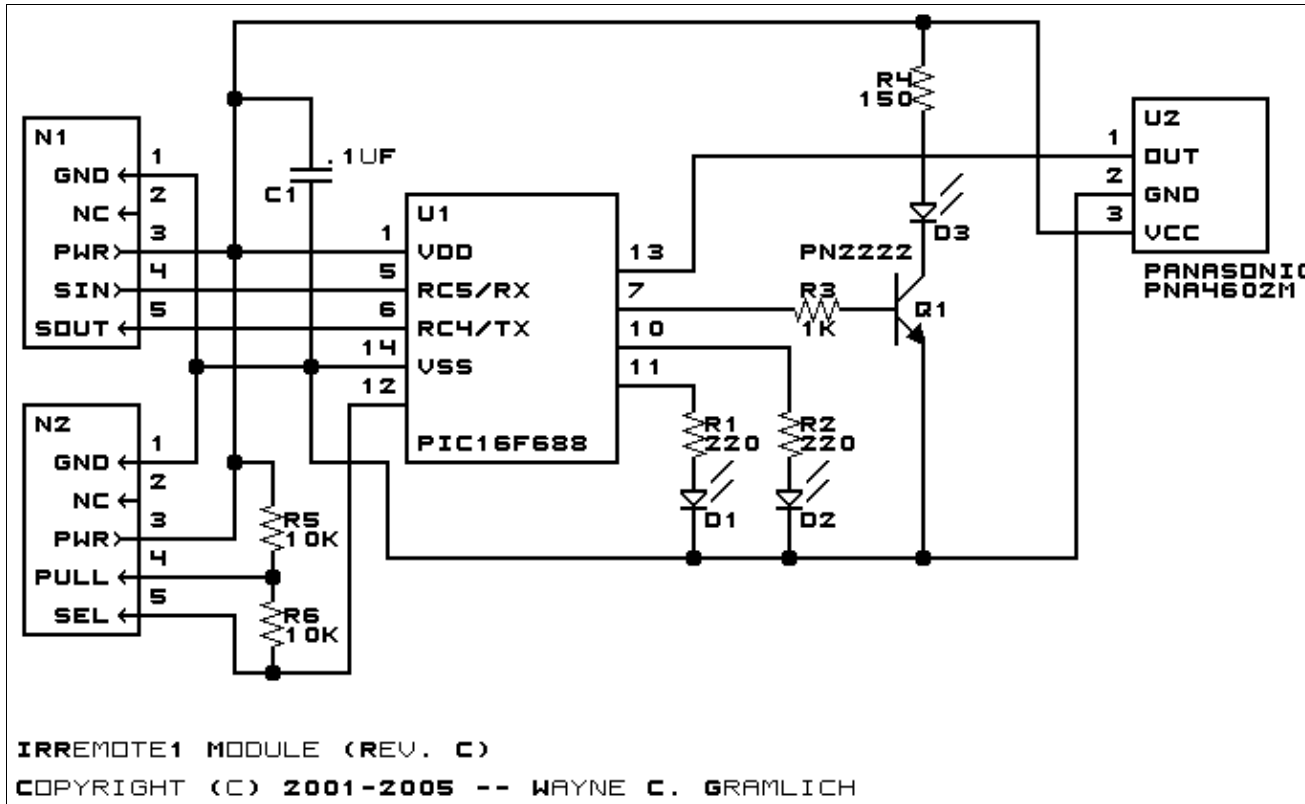

The parts list kept in a separate file -- [irremote1.ptl](#).

3.2 Printed Circuit Board

The available printed circuit boards are listed below:

[irremote1_back.png](#)

The solder side layer.

[irremote1_front.png](#)

The component side layer.

[irremote1_artwork.png](#)

The artwork layer.

[irremote1.gbl](#)

The RS-274X "Gerber" back (solder side) layer.

[irremote1.gtl](#)

The RS-274X "Gerber" top (component side) layer.

[irremote1.gal](#)

The RS-274X "Gerber" artwork layer.

irremote1.drl

The "Excellon" NC drill file.

irremote1.tol

The "Excellon" NC drill rack file.

4. Software

The IRREMOTE1 software is available as one of:

irremote1.ucl

The μ CL source file.

irremote1.asm

The resulting human readable PIC assembly file.

irremote1.lst

The resulting human readable PIC listing file.

irremote1.hex

The resulting Intel[®] Hex file that can be fed into a PIC12C5xx programmer.

5. Issues

Any fabrication issues are listed here.

Copyright (c) 2000–2002 by Wayne C. Gramlich. All rights reserved.