

This is the Revision F version of the Switch8 Module. The status of this project is finished.

# Switch8 Module (Revision F)

## Table of Contents

This document is also available as a PDF document.

- 1. Introduction
- 2. Programming
- 3. Hardware
  - ◆ 3.1 Circuit Schematic
  - ◆ 3.2 Printed Circuit Board
- 4. Software
- 5. Issues

## 1. Introduction

The Switch8 Module allows you to read up to 8 digital inputs. An interrupt can be generated on the states of selected inputs.

## 2. Programming

The basic operation is to send a query to the Switch8 Module to read the 4 bits of data. The programmer can download a complement mask to cause any of the bits to be complemented prior to reading.

The Switch8 Module supports Module Interrupt Protocol. The interrupt pending bit is set whenever the formula:

$$L \& (\sim I) \mid H \& I \mid R \& (\sim P) \& I \mid F \& P \& (\sim I)$$

is non-zero, where:

- I is the current input bits XOR'ed with the complement mask (C)
- P is the previous value of I
- L is the low mask
- H is the high mask
- R is the raising mask
- F is the falling mask

and

- $\sim$  is bit-wise complement
- $\mid$  is bit-wise OR
- $\&$  is bit-wise AND

Once the interrupt pending bit is set, it must be explicitly cleared by the user.

## Switch8 Module (Revision F)

The Switch8 Module supports both the standard shared commands and the shared interrupt commands in addition to the following commands:

Command	Send/ Receive	Byte Value								Discussion
		7	6	5	4	3	2	1	0	
Read Inputs	Send	0	0	0	0	0	0	0	0	Return input values <i>abcdefgh</i> (after XOR'ing with complement mask)
	Receive	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i>	<i>f</i>	<i>g</i>	<i>h</i>	
Read Complement Mask	Send	0	0	0	0	0	0	0	1	Return complement mask <i>ccccccc</i>
	Receive	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	
Read Low Mask	Send	0	0	0	0	0	0	1	0	Return low mask <i>lllllll</i>
	Receive	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	
Read High Mask	Send	0	0	0	0	0	0	1	1	Return high mask <i>hhhhhhh</i>
	Receive	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	
Read Raising Mask	Send	0	0	0	0	0	1	0	0	Return raising mask <i>rrrrrrr</i>
	Receive	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	
Read Falling Mask	Send	0	0	0	0	0	1	0	1	Return falling mask <i>ffffff</i>
	Receive	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	
Read Raw	Send	0	0	0	0	1	0	0	0	Return raw data <i>abcd</i> (without XOR'ing with complement mask)
	Receive	<i>a</i>	<i>b</i>	<i>c</i>	<i>d</i>	<i>e</i>	<i>f</i>	<i>g</i>	<i>h</i>	
Set Complement Mask	Send	0	0	0	0	1	0	0	1	Set complement mask to <i>ccccccc</i>
	Send	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	<i>c</i>	
Set Low Mask	Send	0	0	0	0	1	0	1	0	Set low mask to <i>lllllll</i>
	Send	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	<i>l</i>	
Set High Mask	Send	0	0	0	0	1	0	1	1	Set high mask to <i>hhhhhhh</i>
	Send	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	<i>h</i>	
Set Raising Mask	Send	0	0	0	0	1	1	0	0	Set raising mask to <i>rrrrrrr</i>
	Send	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	<i>r</i>	
Set Falling Mask	Send	0	0	0	0	1	1	0	1	Set falling mask to <i>ffffff</i>
	Send	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	<i>f</i>	
Read Interrupt Bits	Send	1	1	1	0	1	1	1	1	Return the interrupt pending bit <i>p</i> and the interrupt enable bit <i>e</i> .
	Receive	0	0	0	0	0	0	<i>e</i>	<i>p</i>	
<u>Set Interrupt Commands</u>	Send	1	1	1	1	0	<i>c</i>	<i>c</i>	<i>c</i>	Set Interrupt Command <i>ccc</i> .
<u>Shared Commands</u>	Send	1	1	1	1	1	<i>c</i>	<i>c</i>	<i>c</i>	Execute Shared Command <i>ccc</i> .


### 3. Hardware

The hardware consists of a circuit schematic and a printed circuit board.

#### 3.1 Circuit Schematic

The schematic for the Switch8 Module is shown below:

## Switch8 Module (Revision F)

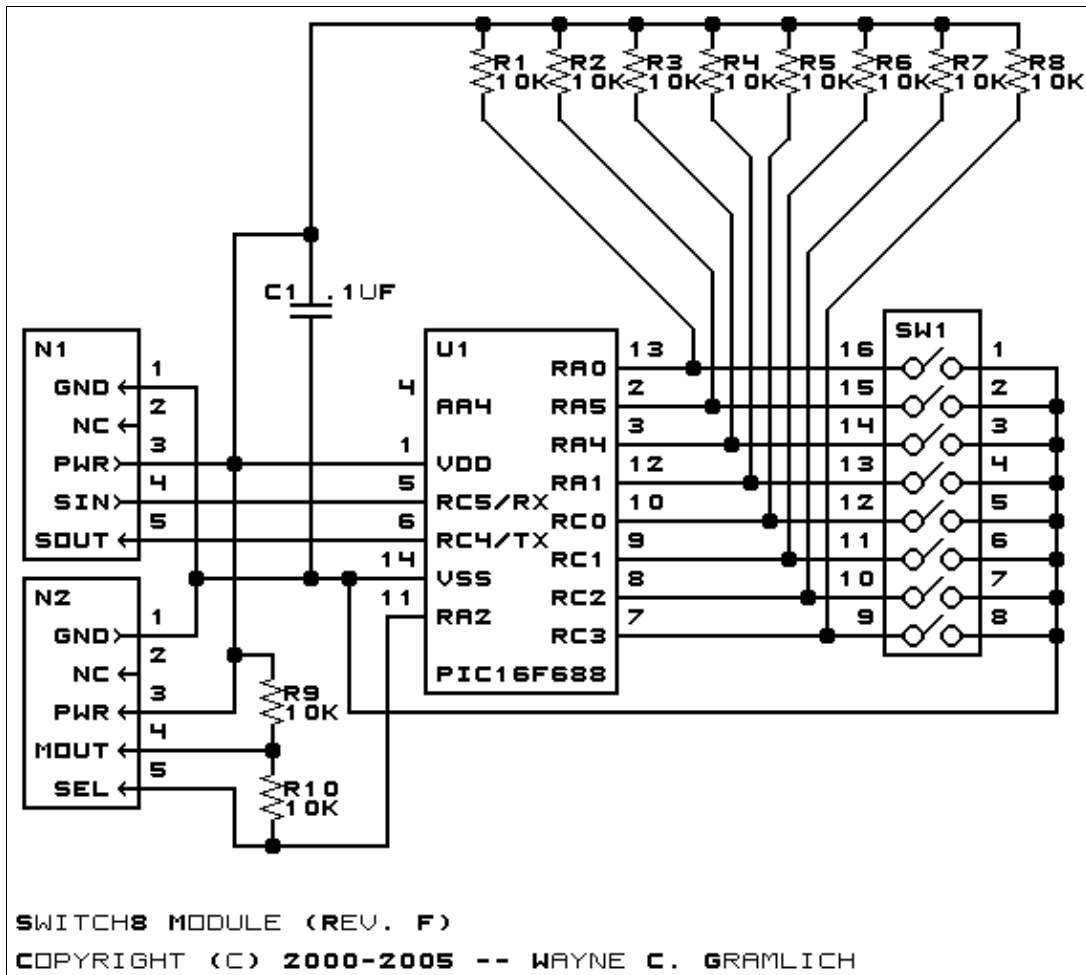

The parts list kept in a separate file -- [switch8.ptl](#).

### 3.2 Printed Circuit Board

The printed circuit board files are listed below:

[switch8\\_back.png](#)

The solder side layer.

[switch8\\_front.png](#)

The component side layer.

[switch8\\_artwork.png](#)

The artwork layer.

[switch8.gbl](#)

The RS-274X "Gerber" back (solder side) layer.

[switch8.gtl](#)

The RS-274X "Gerber" top (component side) layer.

[switch8.gal](#)

The RS-274X "Gerber" artwork layer.

[switch8.drl](#)

The "Excellon" NC drill file.

[switch8.tol](#)

The "Excellon" tool rack file.

## 4. Software

The Switch8 software is available as one of:

*switch8.ucl*

The  $\mu$ CL source file.

*switch8.asm*

The resulting human readable PIC assembly file.

*switch8.lst*

The resulting human readable PIC listing file.

*switch8.hex*

The resulting Intel<sup>®</sup> Hex file.

## 5. Issues

Any fabrication issues are listed here.

---

Copyright (c) 2000–2005 by Wayne C. Gramlich. All rights reserved.